

BH201209 Series


Features :

- Use on high current circuits due to its low DC resistance.
- Meet power lines to the maximum at 3A DC.
- For EMI suppression of the high DC current power line.
- Operating temperature range of -55°C to +125°C
- Storage temperature range of -40°C to +85°C

Applications :

- Various power lines of electronic equipment.
- Various automotive electronics.
- Mother board, tablet PC, laptop, desktop computer and peripheral equipment.

Shapes And Dimensions : (Unit :mm)



L	W	T	E
2.0 ± 0.2	1.25 ± 0.2	0.9 +0.15 / -0.2	0.2~0.8

Part Number Code :


BH 201209 A 121 -E

① ② ③ ④ ⑤

- 1 : Series
2 : Dimensions L x W x T
3 : Material Code
4 : Normal Impedance
5 : Lead-Free

Reflow Profile :

Peak Temp : 260°C
Max time above 230°C 50sec
Max time above 200°C 70sec

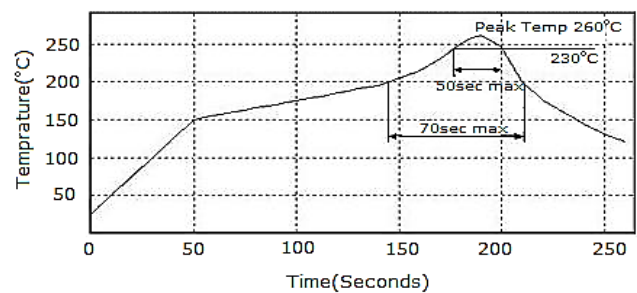

BF100505 Series

Part No.	Impedance $\Omega \pm 25\%$ @100MHz	DCR(Ω) (max.)	Rated Current (mA) (max.)
BH201209A110	11	0.03	3000
BH201209A170	17	0.03	3000
BH201209A310	31	0.03	3000
BH201209A470	47	0.03	3000
BH201209A520	52	0.03	3000
BH201209A600	60	0.04	3000
BH201209A800	80	0.04	3000
BH201209A101	100	0.04	3000
BH201209A121	120	0.05	3000
BH201209A221	220	0.05	3000
BH201209A301	300	0.05	3000
BH201209A601 2A	600	0.10	2000
BH201209A102 1A	1000	0.30	1000
BH201209A152 1A	1500	0.30	1000
BH201209B121	120	0.04	3000